

Please refer to the instruction manual of T4PM PULS for the update method.

Compatible with HPS-CT702/HPS-CD700

VI.40

Added support to change the SR mode of HPS-CT702 and HPS-CD700.

* UR mode is not supported. If the servo is set to UR mode, change it to normal mode or SR mode before using it.

Compatible with HPS-CB701

VI.30

Added support to change the SR mode of HPS-CB701.


* UR mode is not supported. If the servo is set to UR mode, change it to normal mode or SR mode before using it.

Compatible with MINI-Z FHSS receiver "Steering force" and "Gyro" functions

VI.20

When MINI-Z FHSS (MFHSS) is selected in the RX system, the setting items of "Steering force" and "Gyro gain" are displayed on the "RECEIVER" screen.

The additional functions "Steering force" and "Gyro gain" are exclusive to the Minute Readysat and cannot be used with the EVO series. Please use channel 3 and channel 4 for the gyro sensitivity adjustment of the EVO series.

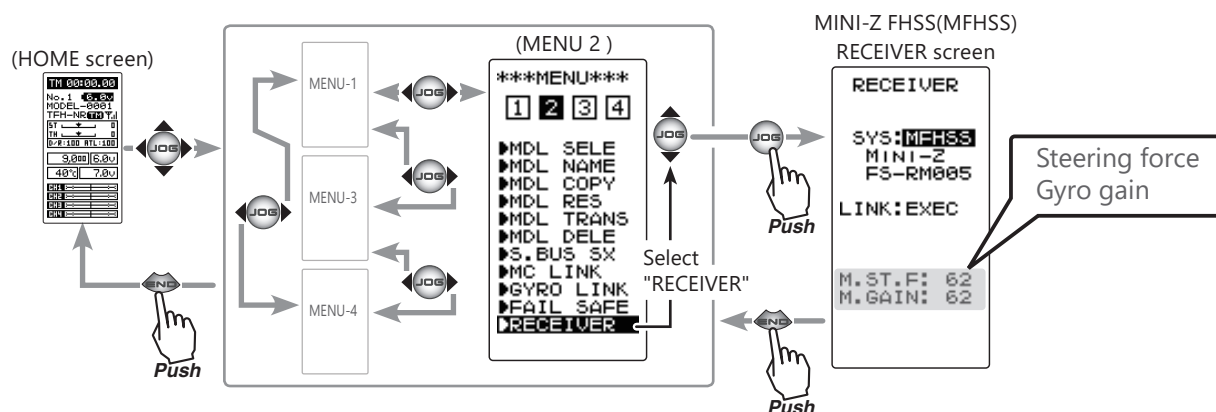

Setting item

M.ST.F: Steering force (0~100: Initial value: 62)

M.GAIN: Gyro gain (0~100: Initial value: 62)

(Note) Immediately after the version upgrade, the steering force and gyro gain settings are the initial values (62), so please set them as necessary.

Adjustment buttons

- Use the (+) and (-) buttons to make adjustments.
- Return to the initial value by pressing the (+) and (-) buttons simultaneously (approx. 1 sec).

With the "TRIM DIAL" function, it is now possible to set the "Steering force" and "Gyro gain" adjustment of the MINI-Z FHSS (MFHSS) to digital trims (DT1, DT2, DT3, DT4, DT5) and dial (DL1).

Abbreviation used on setup screen & function

M.ST.F: Steering force

M.GAIN: Gyro gain