















DT-04 CHASSIS OPTION PARTS

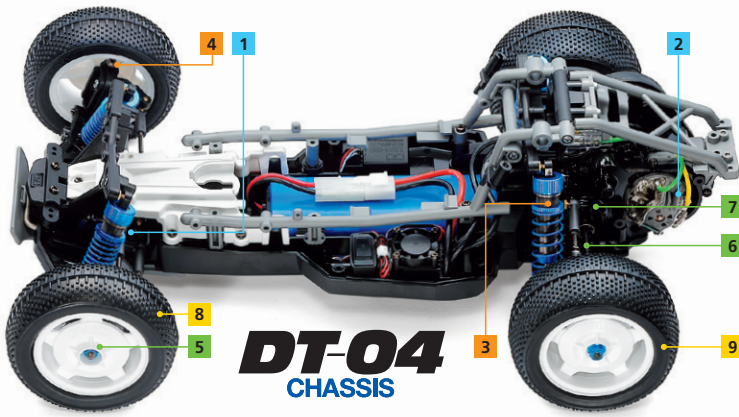

TUNE-UP!

Basic Upgrade Parts Suspension Parts Transmission Parts Tires & Wheels

54704	1	TA07 Aluminum Steering Arm Set
53929	2	Dirt-Tuned Motor (27T)
54993	3	TT-02B/DF-03 Aluminum Damper Set
54237	4	M-05 Low Friction King Pin (4pcs.)
22092	5	DT-04 Full Ball Bearing Set
53791	6	DF-02 Assembly Universal Shaft
53863	7	DT-02 Ball Differential Set
54185	8	Dual Block Tires K (4WD/Front, 62/25)
54186	9	Dual Block Tires K (Rear, 62/35)





※1 Use in place of B10 parts. Do not use kit 850 plastic bearings.

※2 Use kit 3x10mm flat screws when attaching servo to aluminum servo stay. Use 3x10mm screws included in Item 53596 without washers when attaching aluminum servo stay to chassis. Check Item 53596 on our homepage to see details.

※3 Use with Item 22092 DT-04 Full Ball Bearing Set. ※4 Some transponders might obstruct the heat sink.

※5 Adjust O-rings and piston holes used for aluminum damper set. Check Item 54993 on our homepage to see details.

※6 Two sets with six suspension shafts are required if replacing all 3x22mm screw pins.

※7 Use with Item 51207 2WD Off-Road Wide Grooved Front Tires (60/19) and Item 54284 Off-Road Wide-Grooved Soft Tires (2WD/Front, 60/19).

※8 Use with Item 54185 Dual Block Tires K (4WD/Front, 62/25) or Item 54187 Dual Block Tires C (4WD/Front, 62/25).

※9 Use with Item 54573 0.75mm Wheel Spacer (Blue/8pcs.) or Item 53646 Wheel Spacer (Blue). Apply outward offset of 1mm or more.

※10 Use with Item 54186 Dual Block Tires K (Rear, 62/35) or Item 54188 Dual Block Tires C (Rear, 62/35).