

Please refer to the instruction manual of T4PM PULS for the update method.

Compatible with HPS-CB701

Added support to change SR mode of HPS-CB701.


* UR mode is not supported. If the servo is set to UR mode, change it to normal mode or SR mode before using it.

T4PM PLUS Software Update

VI.20

Compatible with MINI-Z FHSS receiver "Steering force" and "Gyro" functions

When MINI-Z FHSS (MFHSS) is selected in the RX system, the setting items of **"Steering force"** and **"Gyro gain"** are displayed on the **"RECEIVER"** screen.

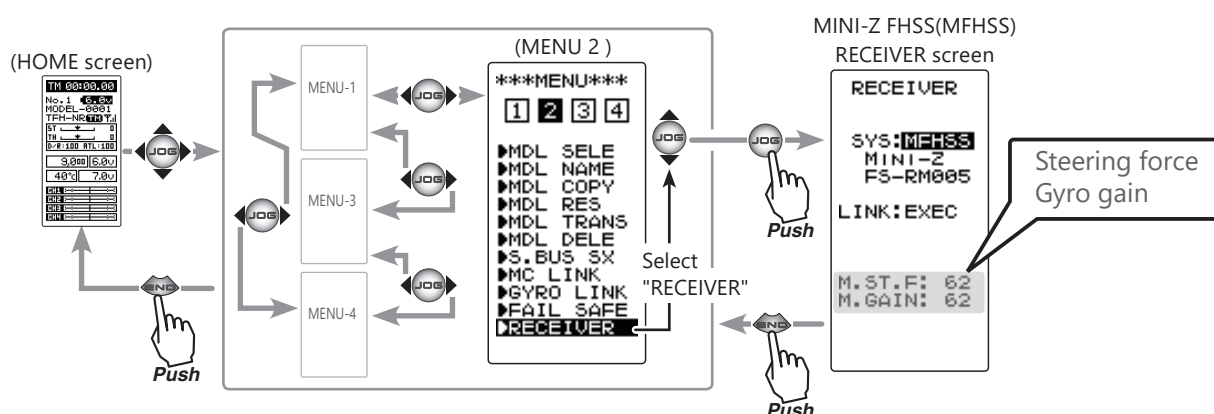

Setting item

M.ST.F: Steering force (0~100: Initial value: 62)

M.GAIN: Gyro gain (0~100: Initial value: 62)

(Note) Immediately after the version upgrade, the steering force and gyro gain settings are the initial values (62), so please set them as necessary.

Adjustment buttons

- Use the (+) and (-) buttons to make adjustments.
- Return to the initial value by pressing the (+) and (-) buttons simultaneously (approx. 1 sec).

With the **"TRIM DIAL"** function, it is now possible to set the **"Steering force"** and **"Gyro gain"** adjustment of the MINI-Z FHSS (MFHSS) to digital trims (DT1, DT2, DT3, DT4, DT5) and dial (DL1).

Abbreviation used on setup screen & function

M.ST.F: Steering force

M.GAIN: Gyro gain